

MINIATURE ALUMINUM
ELECTROLYTIC CAPACITORS

AXW CD26L

2000h at 105°C

- Slim Type
- High ripple current



	AXW				
Rated voltage	Series	Rated Capacitance	Capacitance tolerance	Terminal Code	Sleeve Color

Items	Characteristics						
Operating Temperature Range (°C)	-25 ~ +105						
Voltage Range (V)	200 ~ 500						
Capacitance Range (μF)	12 ~ 220						
Capacitance Tolerance (20°C, 120Hz)	± 20%						
Leakage Current (μA)	After 1 minute at 20°C application of rated voltage, leakage current is not more than 0.02CV. C: Nominal Capacitance (μF) V: Rated Voltage (V)						
Dissipation Factor (20°C, 120Hz)	Rated Voltage (V)	200	250	400	420	450	500
	Tan δ (max)	0.12	0.15			0.20	
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	200 ~ 250		400 ~ 500			
	$Z_{-25^\circ\text{C}} / Z_{+20^\circ\text{C}}$	3		8			

	Useful Life		Load Life	Endurance Test	Shelf Life
Lifetime	4000h		> 100000h	2000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U_g I_g 105°C	U_g $1.2 \times I_g$ 40°C	U_g I_g 105°C	$U_g = 0$ $I_g = 0$ 105°C	After test: U_g to be applied for 30min $I_g = 0$ 105°C >24h before measurement


Dimensions

mm

Frequency Coefficient

	Frequency(Hz)	50/60	120	500	1K	>10K
Coefficient	200 ~ 250V	0.8	1.0	1.20	1.30	1.40
	400 ~ 500V	0.8	1.0	1.25	1.40	1.50

Lifetime Diagram

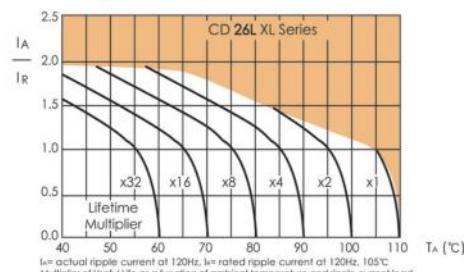

Temperature Coefficient

Temperature(°C)	+70	+85	+105
Coefficient	1.8	1.4	1.0

AXW CD26L



MINIATURE ALUMINUM
ELECTROLYTIC CAPACITORS

Ratings for CD 26L Series

U _r (Surge Voltage) Code	Rated Capacitance (μF)	Max ESR 20°C,120Hz (Ω)	Typ ESR 20°C,120Hz (Ω)	Rated Ripple Current 105°C,120Hz (mA rms)	Size ΦD x L (mm)
(V)					
200 (250) 2D	82	1.9	1.2	400	10×30
	100	1.6	1	460	10×36
	120	1.3	0.8	530	10×40
	150	1.1	0.6	620	12.5×30
	180	0.9	0.5	700	12.5×36
	220	0.7	0.4	800	12.5×40
250 (300) 2E	47	4.2	2.5	295	8×50
	68	2.9	1.8	330	10×36
	82	2.4	1.5	420	10×40
	100	2	1.2	480	10×50
	120	1.7	1	560	12.5×36
	150	1.3	0.8	650	12.5×40
400 (450) 2G	27	9.8	4.4	240	10×30
	33	8.0	3.6	280	10×36
	39	6.8	3.1	320	10×40
	47	5.6	2.5	370	12.5×30
	56	4.7	2.1	420	12.5×36
	68	3.9	1.8	480	12.5×45
420 (470) 2X	82	3.2	1.5	520	12.5×50
	100	2.7	1.2	580	12.5×50
	22	12	7.2	200	10×30
	27	9.8	5.9	230	10×36
	33	8	4.8	270	10×40
	39	6.8	4.1	310	12.5×30
450 (500) 2W	47	5.6	3.4	360	12.5×36
	56	4.7	3.4	360	10×50
	68	3.9	2.3	490	12.5×45
	82	3.2	1.9	550	12.5×50
	12	22.1	13.2	120	6.3×50
	18	14.7	8.8	180	8×50
500 (550) 2H	21	12.6	7.5	210	8×50
	27	9.8	5.9	250	10×40
	33	8.0	4.8	280	12.5×30
	39	6.8	4.1	320	12.5×36
	47	5.7	3.4	380	12.5×40
	53	5.0	3.0	410	10×50
	56	4.7	2.8	440	12.5×50
	60	4.4	2.6	470	10×60
	68	3.9	2.3	550	12.5×50
	82	3.2	1.9	667	12.5×50
	100	2.7	1.6	800	12.5×61
	22	12.1	7.2	190	8×50
	39	6.8	4.1	300	10×50
	47	5.7	3.4	400	12.5×50
	53	5	3.0	420	12.5×61
	56	4.7	2.8	450	12.5×61

MINIATURE