



双电层电容器 ELECTRIC DOUBLE LAYER CAPACITORS

FMC

FMC 系列
SERIES

- Double cells in series 串联双单体模组
- Higher rated voltage 更高额定电压
- Long lifetime with over 500,000 duty cycles 高达 500,000 次循环寿命
- Used in Intelligent instrument, UPS, Security equipment,
Computer storage, Communications equipment, Taillight, Small appliances, Flashlight
应用于智能仪表、UPS、安防设备、计算机存储器、通信设备、车尾灯、小家电、手电筒
- 65°C 1500hours



SPECIFICATIONS 性能要求

Item 项目	Performance Characteristics 使用特性
Operating Temperature Range 工作温度范围	-40°C ~ +65°C (85°C)
Rated Voltage 额定电压	6.0V.DC (5.4V.DC)
Surge Voltage 浪涌电压	6.32V.DC
Capacitance Tolerance 容量偏差	-20%~+50%
DC Leakage Current 漏电流(72h)	After 72 hours application of rated voltage at +25°C 在+25°C下施加额定电压 72 小时后
Characteristics at High and Low Temperatures 高温及低温特性	Capacitance range 容量偏差 Within ±30% of the initial value. ΔC≤初始测量值的 30%
	ESR range 电阻偏差 Less than 200% of the initial value. ΔESR≤初始测量值的 200%
Shelf Life 贮存寿命	The specifications shall be met after storage at upper category temperature for 1500 hours 工作温度上限下无负荷贮存 1500 小时后电容器符合以下的限值
	Capacitance range 容量偏差 Within ±30% of the initial value. ΔC≤初始测量值的 30%
High Temperature Loaded 耐久性测试	The specifications shall be met after rated voltage applied at upper category temperature for 1500 hours 工作温度上限下负载额定电压 1500 小时后电容器符合以下的限定值
	Capacitance range 容量偏差 Within ±30% of the initial value. ΔC≤初始测量值的 30%
Cycle Life 循环寿命	The specifications shall be met after 500,000 cycles at 25°C, cycle of charge/discharge from V _R to 1/2V _R +25°C下以恒定电流使电容器在额定电压和半额定电压之间循环充放电 500,000 次
	Capacitance range 容量偏差 Within ±30% of the initial value. ΔC≤初始测量值的 30%
	ESR range 电阻偏差 Less than 200% of the initial value. ΔESR≤初始测量值的 200%



双电层电容器 ELECTRIC DOUBLE LAYER CAPACITORS


FMC

Part Number 产品型号体系表



※ 容量偏差 (Capacitance Tolerance) □: M: ±20%; Q: -10%~+30%; V: -10%~+20%; S: -20%~+50%; A: 0%~+20%

Dimensions (mm) 尺寸

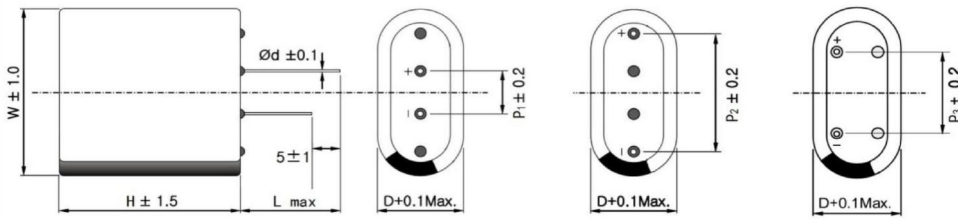

D	8	10	12.5
P	4.7/12.0/8.5	5.5/15.0/10.5	7.5/18.0/13.0
d	0.6	0.6	0.6

Standard size 标准品一览表

Rated Voltage 额定电压 (V.DC)	Rated Capacitance 额定容量(F)	ESR(mΩ)		Leakage Current 漏电流 (μA/ 72hours)	ΦD×W×H (mm)	Part No. 编号
		AC (1kHz)	DC			
6.0	0.5	220	440	5	8.5×17×15	ECFMC6R0504S081715
	1.5	110	220	8	8.5×17×23	ECFMC6R0155S081723
	2.5	70	140	10	8.5×17×23	ECFMC6R0255S081723
	4.0	60	120	15	11×21×23	ECFMC6R0405S112123
	5.0	50	100	20	11×21×27	ECFMC6R0505S112127
	7.5	40	80	25	13×26×28	ECFMC6R0755S132628