

5000h at 85°C

- Features
 - 600V with 5000h at 85°C
 - RoHS Compliant
- Applications
 - High Professional Inverters and Power Supplies




SCREW

Items	Characteristics
Operating Temperature Range (°C)	-25 ~ +85
Voltage Range (V)	600
Capacitance Range (µF)	1000 ~ 5600
Capacitance Tolerance (20°C, 120Hz)	± 20%
Leakage Current (µA)	After 5 minutes at 20°C application of rated voltage, leakage current is not more than 0.01CV or 5mA, whichever is smaller. C: Nominal Capacitance (µF) V: Rated Voltage (V)
Dissipation Factor (20°C, 120Hz)	Less than 0.25

Lifetime	Useful Life		Load Life	Endurance Test	Shelf Life
	>10000h	>100000h	5000h	5000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U_R I_R 85°C	U_R $1.2 \times I_R$ 40°C	U_R I_R 85°C	U_R $I_R = 0$ 85°C	$U_R = 0$ $I_R = 0$ 85°C After test: U_R to be applied for 60min >24h before measurement

Dimensions


mm

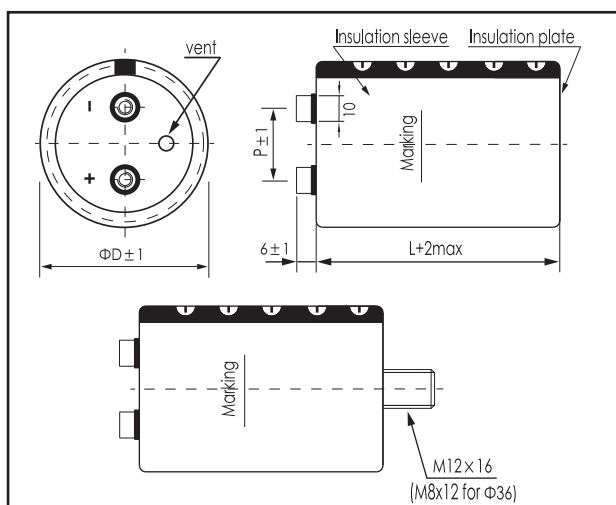

ΦD/mm	51	64	77	90	101
P/mm	22.0	28.2	31.4	31.4	41.5

*Hex head screw M5 x 10 and M6 x 12 are standard screws. Longer screws are available on request.
 *Max tightening torque for screw terminal M5: 3Nm, M6: 4Nm. Max torque for bolt mounting M12: 12.5Nm.
 *Screws, Bracket and cap nut will be delivered separately. See "Accessories" for shape and dimensions.

Part Number System

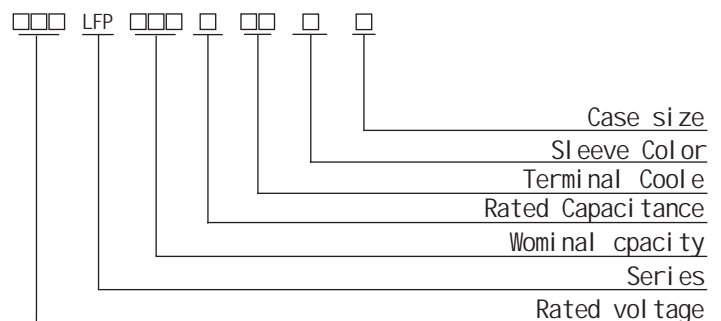

Ripple Current Coefficient

Frequency (Hz)	50/60	120	300	1k	>10k
Coefficient	0.80	1.00	1.10	1.30	1.40

Ambient Temp (°C)	40	60	85
Coefficient	1.89	1.67	1.00

The useful life can be prolonged by operating capacitor at loads below the rated values (e.g. lower operating voltage, Rms ripple current or ambient temperature) and by appropriate cooling measures.
 It is advisable not to apply a ripple current exceeding the rated ripple current without any cooling measures as this will shorten capacitor's life.


Ratings for CD 13P Series

SCREW

U_R (Surge Voltage) Code	Rated Capacitance	Max.ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 85°C,120Hz	Size $\Phi D \times L$
(V)	(μF)	(m Ω)	(m Ω)	(Arms)	(mm)
600 (650) 2S	1000	210	105	5.4	64×130
	1200	188	94	6.1	77×115
	1500	150	75	7.3	77×130
	1800	124	62	8.9	77×155
	2200	102	51	9.7	90×131
	2700	90	45	11.6	90×157
	3300	76	38	13.4	90×171
	3900	66	33	16.2	90×196
	4700	56	28	19.5	90×196
	5600	50	25	22.5	101×220

Mounting code("B" for bolt mounting, "Y/I/N" for bracket mounting)
Terminal options(A,B,C see "Dimensions" for details.)

Lifetime Diagram

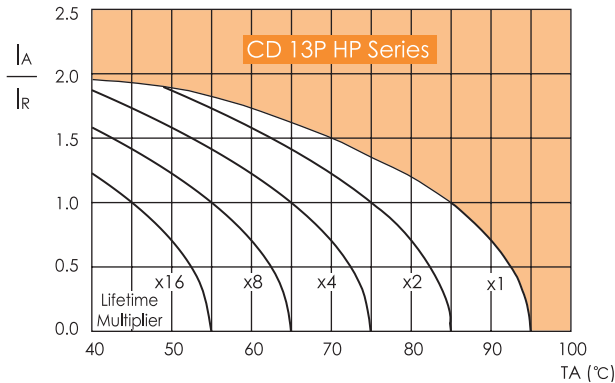

I_A = actual ripple current at 120Hz, I_R = rated ripple current at 120Hz, 85°C
Multiplier of Useful Life as a function of ambient temperature and ripple current load

Capacitor diameter d(mm)	length l(mm)	Packing units (pcs.)	
51	all	42	
63.5	all	30	
77	all	12	15
89	all	8	
100	all	6	