



MINIATURE ALUMINUM
ELECTROLYTIC CAPACITORS

VXW CD26H

3000 ~ 5000h at 105°C

- Slim Type
- High ripple current




	VXW				DXL
Rated voltage	Series	Rated Capacitance	Capacitance tolerance	Terminal Code	Sleeve Color

Items	Characteristics				
Operating Temperature Range (°C)	-25 ~ +105				
Voltage Range (V)	200 ~ 500				
Capacitance Range (μF)	33 ~ 220				
Capacitance Tolerance (20°C, 120Hz)	± 20%				
Leakage Current (μA)	After 1 minute at 20°C application of rated voltage, leakage current is not more than 0.02CV. C: Nominal Capacitance (μF) V: Rated Voltage (V)				
Dissipation Factor (20°C, 120Hz)	Rated Voltage (V)	200	250 ~ 420	450	500
	Tan δ (max)	0.12	0.15	0.12	0.20
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	200 ~ 250	400 ~ 500		
	$Z_{-25^\circ\text{C}} / Z_{+20^\circ\text{C}}$	3	8		

MINIATURE

	Useful Life	Load Life	Endurance Test	Shelf Life
Lifetime	$\Phi < 10$: 6000h $\Phi > 10$: 10000h	$\Phi > 250000h$	$\Phi \leq 10: 3000h$ $\Phi > 10: 5000h$	1000h
Leakage Current	Not more than specified value	Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value	Not more than 200% of specified value	Not more than 300% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U_R I_R 105°C 40°C	U_R I_R 105°C	U_R $I_R = 0$ 105°C	$U_R = 0$ $I_R = 0$ 105°C After test: U_R to be applied for 30min >24h before measurement


Dimensions mm

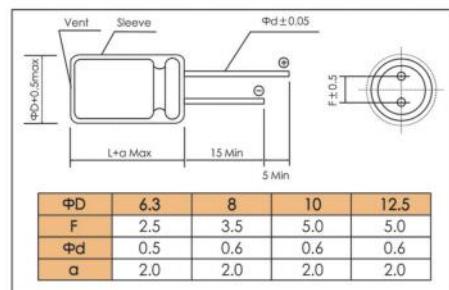

Frequency Coefficient

	Frequency(Hz)	50/60	120	500	1K	$\geq 10K$
Coefficient	200 ~ 250V	0.8	1.0	1.20	1.30	1.40
	400 ~ 500V	0.8	1.0	1.25	1.40	1.50


Lifetime Diagram

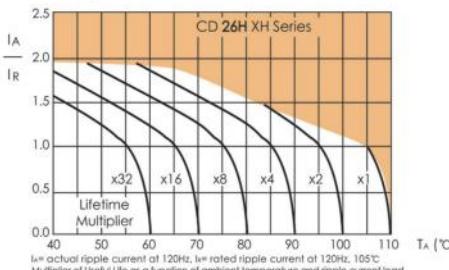

Temperature Coefficient

Temperature(°C)	+70	+85	+105
Coefficient	1.8	1.4	1.0

VXW CD26H



MINIATURE ALUMINUM
ELECTROLYTIC CAPACITORS

Ratings for CD 26H Series

U_s (Surge Voltage) Code	Rated Capacitance (μF)	Max ESR 20°C,120Hz (Ω)	Typ ESR 20°C,120Hz (Ω)	Rated Ripple Current 105°C,120Hz (mAmps)	Size ΦD x L (mm)	P/N
(V)	(μF)	(Ω)	(Ω)	(mAmps)	(mm)	-
200 (250) 2D	82	1.9	1.0	420	10×36	ECR2DXH820M□□100036
	100	1.6	0.9	480	10×40	ECR2DXH101M□□100040
	120	1.3	0.7	540	10×45	ECR2DXH121M□□100045
	150	1.1	0.6	650	12.5×36	ECR2DXH151M□□125036
	180	0.9	0.5	730	12.5×42	ECR2DXH181M□□125042
	220	0.7	0.4	840	12.5×45	ECR2DXH221M□□125045
250 (300) 2E	47	4.2	2.3	310	8×50	ECR2EXH470M□□080050
	68	2.9	1.6	340	10×36	ECR2EXH680M□□100036
	82	2.4	1.3	440	10×43	ECR2EXH820M□□100043
	100	2	1.1	500	10×50	ECR2EXH101M□□100050
	120	1.7	0.9	580	12.5×40	ECR2EXH121M□□125040
	150	1.3	0.7	680	12.5×45	ECR2EXH151M□□125045
	180	1.1	0.6	760	12.5×50	ECR2EXH181M□□125050
	220	0.9	0.5	880	12.5×61	ECR2EXH221M□□125061
400 (450) 2G	33	6.0	3.3	290	10×40	ECR2GXH330M□□100040
	47	4.2	2.3	390	10×50	ECR2GXH470M□□100050
	47	4.2	2.3	390	12.5×35	ECR2GXH470M□□125035
	56	3.6	2	440	12.5×40	ECR2GXH560M□□125040
	68	2.9	1.6	500	12.5×45	ECR2GXH680M□□125045
	82	2.4	1.3	540	12.5×61	ECR2GXH820M□□125061
	100	2	1.1	610	12.5×61	ECR2GXH101M□□125061
	39	4.1	2.2	320	10×45	ECR2XXH390M□□100045
420 (470) 2X	47	3.4	1.9	370	10×50	ECR2XXH470M□□100050
	56	2.8	1.6	450	12.5×40	ECR2XXH560M□□125040
	68	2.3	1.3	520	12.5×45	ECR2XXH680M□□125045
	82	1.9	1.1	580	12.5×61	ECR2XXH820M□□125061
	12	13.3	7.5	130	6.3×50	ECR2WXH120M□□063050
450 (500) 2W	18	8.8	5	190	8×50	ECR2WXH180M□□080050
	21	7.6	4.3	200	8×50	ECR2WXH210M□□080050
	27	5.9	3.3	230	10×40	ECR2WXH270M□□100040
	33	4.8	2.7	290	10×45	ECR2WXH330M□□100045
	39	4.1	2.2	330	10×50	ECR2WXH390M□□100050
	39	4.1	2.2	330	12.5×36	ECR2WXH390M□□125036
	47	5.6	2.8	400	12.5×40	ECR2WXH470M□□125040
	53	5.0	2.5	430	12.5×45	ECR2WXH530M□□125045
	56	4.7	2.4	460	12.5×50	ECR2WXH560M□□125050
	68	2.3	1.3	540	12.5×50	ECR2WXH680M□□125050
	82	1.9	1	600	12.5×61	ECR2WXH820M□□125061
	22	12.1	6.6	200	8×50	ECR2HXH220M□□080050
500 (550) 2H	39	6.8	3.7	310	10×50	ECR2HXH390M□□100050
	47	5.6	2.8	410	12.5×50	ECR2HXH470M□□125050
	53	5.0	2.5	440	12.5×61	ECR2HXH530M□□125061
	56	4.7	2.4	470	12.5×61	ECR2HXH560M□□125061

MINIATURE