

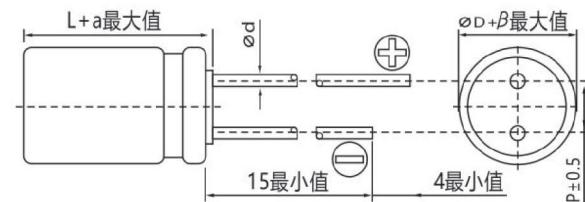
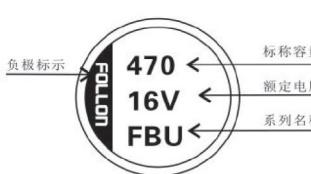
**HIGH TEMP**  
高温品

- 125°C 4000hours assured  
125°C 4000 小时寿命保证
- Low ESR and High ripple current  
低等效串联电阻(ESR) 并可承受高纹波电流
- RoHS compliance符合RoHS 指令

New 新品

**Specifications 特性表**

Items 项目	Characteristics 主要特性																										
Operation Temperature Range 使用温度范围	-55°C~125°C																										
Voltage Range 额定电压范围	16~80V																										
Capacitance Range 额定容量范围	22~470																										
Capacitance Tolerance 额定容量容许误差值	±20% at 120Hz, 20°C																										
Dissipation Factor (Tanδ) 损失角	Standard Ratings 标准品一览表																										
Leakage Current 漏电流	<p>I=0.01CV or 3(μA) whichever is greater (after 2 minutes)            Where, C= rated capacitance in μF, V= rated DC working voltage in V  <math>I = 0.01CV \text{ or } 3(\mu\text{A}/\text{微安})</math>之中任一个较大值以下(2分钟后)            I = 漏电流(μA/微安)、C = 额定静电容量(μF/微法拉)、V = 额定直流工作电压(V/伏特)</p>																										
Stability at Low Temperature (at 120Hz) 低温特性	<p>Impedance ratio shall not exceed the values given in the table below 阻抗比不可大于下表所列数值</p> <table border="1"> <thead> <tr> <th>Rated Voltge 电压(V)</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio</td> <td>Z(-25°C)/Z(20°C)</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> </tr> <tr> <td></td> <td>Z(-55°C)/Z(20°C)</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> </tr> </tbody> </table>						Rated Voltge 电压(V)	16	25	35	50	63	80	Impedance ratio	Z(-25°C)/Z(20°C)	1.5	1.5	1.5	1.5	1.5		Z(-55°C)/Z(20°C)	2.0	2.0	2.0	2.0	2.0
Rated Voltge 电压(V)	16	25	35	50	63	80																					
Impedance ratio	Z(-25°C)/Z(20°C)	1.5	1.5	1.5	1.5	1.5																					
	Z(-55°C)/Z(20°C)	2.0	2.0	2.0	2.0	2.0																					
Endurance 耐久性	<p>After 4000Hrs. Application of the rated voltage at 125°C, returned to 20°C for testing, they meet the characteristics listed below.            在125°C 下连续施加额定电压4000小时后，返回20°C进行测试时，满足以下项目</p> <table border="1"> <tbody> <tr> <td>Capacitance Change 静电容量变化率</td> <td>Within ±30% of initial value ≤ 初始值的±30%</td> </tr> <tr> <td>Tanδ损失角</td> <td>Less than 200% of specified value ≤ 初始值的200%</td> </tr> <tr> <td>ESR 等效串联电阻</td> <td>Less than 200% of specified value ≤ 初始值的200%</td> </tr> <tr> <td>Leakage Current 漏电流</td> <td>Within specified value ≤ 初始规格值</td> </tr> </tbody> </table>						Capacitance Change 静电容量变化率	Within ±30% of initial value ≤ 初始值的±30%	Tanδ损失角	Less than 200% of specified value ≤ 初始值的200%	ESR 等效串联电阻	Less than 200% of specified value ≤ 初始值的200%	Leakage Current 漏电流	Within specified value ≤ 初始规格值													
Capacitance Change 静电容量变化率	Within ±30% of initial value ≤ 初始值的±30%																										
Tanδ损失角	Less than 200% of specified value ≤ 初始值的200%																										
ESR 等效串联电阻	Less than 200% of specified value ≤ 初始值的200%																										
Leakage Current 漏电流	Within specified value ≤ 初始规格值																										
Shelf Life Test 高温储存特性	<p>After storage for 1000Hrs at 105°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance.(With voltage treatment)            于 125°C 环境中不供给额定电压 1000 小时后，待制品回复至 20°C 的环境中进行量测时，需满足同耐久性试验要求 (可进行电压 补偿后再行量测)。</p>																										
Resistance to Soldering Heat 焊锡耐热性	<p>After reflow soldering and restored at room temperature, they meet the characteristics listed below.            经过回流焊并冷却至室温后，电容器的特性符合下表的要求。</p> <table border="1"> <tbody> <tr> <td>Capacitance Change 静电容量变化率</td> <td>Within ±10% of initial value ≤ 初始值的±10%</td> </tr> <tr> <td>Tanδ损失角</td> <td>Less than 100% of specified value ≤ 初始值的100%</td> </tr> <tr> <td>ESR 等效串联电阻</td> <td>Less than 100% of specified value ≤ 初始值的100%</td> </tr> <tr> <td>Leakage Current 漏电流</td> <td>Within specified value ≤ 初始规格值</td> </tr> </tbody> </table>						Capacitance Change 静电容量变化率	Within ±10% of initial value ≤ 初始值的±10%	Tanδ损失角	Less than 100% of specified value ≤ 初始值的100%	ESR 等效串联电阻	Less than 100% of specified value ≤ 初始值的100%	Leakage Current 漏电流	Within specified value ≤ 初始规格值													
Capacitance Change 静电容量变化率	Within ±10% of initial value ≤ 初始值的±10%																										
Tanδ损失角	Less than 100% of specified value ≤ 初始值的100%																										
ESR 等效串联电阻	Less than 100% of specified value ≤ 初始值的100%																										
Leakage Current 漏电流	Within specified value ≤ 初始规格值																										
Marking 标识	Blue print on the case top. 铝壳顶部蓝色印刷																										

**DRAWING (Unit: mm) 外形图****DIMENSIONS (Unit: mm) 尺寸表**

尺寸	6.3X6	6.3X8	8X10	10X10	10X12
ΦD	6.3	6.3	8	10	10
L	6	8	10	10	12
P	2.5	2.5	3.5	5.0	5.0
Φd	0.45	0.45	0.60	0.60	0.60
α	1.0	1.0	1.0	1.0	1.0
β	0.5	0.5	0.5	0.5	0.5

**Specifications 标准品一览表**

Rated Volt.(V)	Surge Voltage(V)	Capacitance(μF)	Size ΦDXL (mm)	Tanδ 120Hz, 20°C	LC(μA) 2minutes	ESR (mΩ) 20°C 100KHZ	Rated R.C (mA/rms at 100KHz,125°C)
16V(1C)	18.4	82	6.3X6	0.16	13.1	50	900
		150	6.3X8	0.16	24	30	1,400
		270	8X10	0.16	43.2	27	1,600
		470	10X10	0.16	75.2	20	2,000
		47	6.3X6	0.14	11.8	50	900
		56	6.3X6	0.14	14	50	900
		68	6.3X8	0.14	17	30	900
		100	6.3X8	0.14	25	30	1,400
		150	8X10	0.14	37.5	27	1,400
		220	8X10	0.14	55	27	1,600
25V(1E)	28.8	330	10X10	0.14	82.5	20	1,600
		10X12	0.14	82.5	16	2,000	
		27	6.3X6	0.12	9.5	60	900
		33	6.3X6	0.12	11.6	60	900
		47	6.3X6	0.12	16.5	60	900
		68	6.3X8	0.12	23.8	35	1,400
		100	8X10	0.12	35	27	1,600
		150	8X10	0.12	52.5	27	1,600
		220	10X10	0.12	77	20	2,000
		270	10X10	0.12	94.5	20	2,000
35V(1V)	40.3	22	6.3X6	0.10	11	80	750
		33	6.3X8	0.10	16.5	40	1,100
		47	8X10	0.10	23.5	30	1,250
		68	8X10	0.12	34	30	1,250
		100	10X10	0.10	50	28	1,600
		10	6.3X5.8	0.08	6.3	120	1,600
		22	6.3X7.7	0.08	13.9	80	700
		27	8X10	0.08	17	40	900
		33	8X10	0.08	20.8	40	1,100
		47	8X10	0.08	29.6	40	1,100
63V(1J)	72.5	56	10X10	0.08	35.3	30	1,100
		10X12	0.08	35.3	26	1,500	
		68	10X10	0.08	42.8	30	1,400
		82	10X10	0.08	51.7	30	1,400
		22	8X10	0.08	17.6	45	1,050
		33	10X10	0.08	26.4	36	1,360
		47	10X10	0.08	37.6	36	1,360
		22	6.3X6	0.08	11	80	750
		33	6.3X8	0.08	16.5	40	1,100
		47	8X10	0.08	23.5	30	1,250
80V(1K)	92.0	68	8X10	0.08	34	40	1,100
		100	10X10	0.08	51.7	30	1,400
		10	6.3X5.8	0.08	17.6	45	1,050

• Case size ΦD XL(mm), ripple current (mA rms) at 105°C, 100KHz • 尺寸ΦD XL(mm), 纹波电流 (mA rms) 于105°C, 100KHz

**Ripple Current and Frequency Multipliers 纹波电流与频率补正系数**

Frequency 频率	120HZ	1KHZ	10KHZ	100KHZ~
Multipliers 补正系数	0.10	0.3		